

—PRODUCT INFORMATION—

Compactron Beam Pentode

26LX6

**FOR TV HORIZONTAL-DEFLECTION
AMPLIFIER APPLICATIONS**

- COLOR TV TYPE**
- 33 WATTS PLATE DISSIPATION**
- 280 VOLTS B+**
- 400 MILLIAMPERES DC CATHODE CURRENT**
- OVER 1 AMPERE PEAK CURRENT**

The 26LX6 is a compactron beam-power pentode primarily designed for use as the horizontal-deflection amplifier in color television receivers. It is characterized by having a very low knee with a very high peak current of over an ampere. This results in a basic capability to scan 90-degree large screen color picture tubes at 25 KV from 280-volt power supplies. Its low knee minimizes "snivets" without the necessity of supplying special voltages to the beam plates.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC* 26 Volts

Heater Current† 0.6±0.04 Amperes

Heater Warm-up Time, Average‡. 11 Seconds

Direct Interelectrode Capacitances, Approximate¶

Grid-Number 1 to Plate: (g1 to p) 1.0 pf

Input: g1 to (h + k + g2 + b.p.) 40 pf

Output: p to (h + k + g2 + b.p.) 17 pf

MECHANICAL

Operating Position - Any

Envelope - T-12, Glass

Base - E12-74, Button 12-Pin

Top Cap - C1-1, Small

Outline Drawing - EIA 12-118

Maximum Diameter 1.563 Inches

Minimum Diameter 1.437 Inches

Maximum Over-all Length. 4.625 Inches

Maximum Seated Height 4.250 Inches

Minimum Seated Height 4.000 Inches


MAXIMUM RATINGS

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

PHYSICAL DIMENSIONS

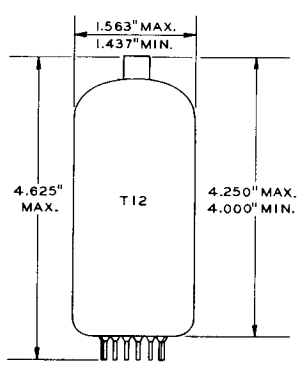


EIA 12-118

TERMINAL CONNECTIONS

- Pin 1 - Heater
- Pin 2 - Cathode
- Pin 3 - Grid Number 2 (Screen)
- Pin 4 - Beam Plates
- Pin 5 - Grid Number 1
- Pin 6 - No Connection
- Pin 7 - Heater
- Pin 8 - No Connection
- Pin 9 - Grid Number 1
- Pin 10 - Beam Plates
- Pin 11 - Grid Number 2 (Screen)
- Pin 12 - Heater
- Cap - Plate

BASING DIAGRAM

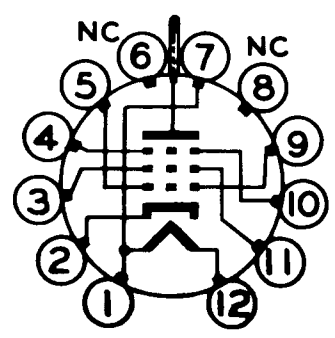

EIA 12JA

MAXIMUM RATINGS (Cont'd)

HORIZONTAL-DEFLECTION AMPLIFIER SERVICE #—

DESIGN-MAXIMUM VALUES UNLESS OTHERWISE INDICATED

DC Plate-Supply Voltage (Boost + DC Power Supply)	990	Volts
Peak Positive Pulse Plate Voltage	7000	Volts
Positive DC Beam Plate Voltage	0	Volts
Screen Voltage	250	Volts
Peak Negative Grid-Number 1 Voltage	250	Volts
Plate Dissipation Δ (Absolute-Maximum Value)	33	Watts
Screen Dissipation	5.0	Watts
DC Cathode Current	400	Milliamperes
Peak Cathode Current	1400	Milliamperes
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component	100	Volts
Total DC and Peak	200	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak	200	Volts
Grid-Number 1 Circuit Resistance ϵ			
With Feedback-Type High Voltage Regulation	1.2	Megohms
With Shunt-Type High Voltage Regulation (Switching Mode)	2.2	Megohms
Beam Plate Circuit Resistance	0	Ohms
Bulb Temperature at Hottest Point**	240	C

CHARACTERISTICS AND TYPICAL OPERATION

AVERAGE CHARACTERISTICS

Plate Voltage	5000	45	60	175	Volts
Beam Plates Connected to Cathode at Socket						
Screen Voltage	110	160	110	110	Volts
Grid-Number 1 Voltage	---	0	0	-21	Volts
Plate Resistance, Approximate	---	---	---	6000	Ohms
Transconductance	---	---	---	14000	Micromhos
Plate Current	---	1100 \pm	750 \pm	125	Milliamperes
Screen Current	---	110 \pm	42 \pm	3.3	Milliamperes
Grid-Number 1 Voltage, Approximate						
I _b = 1.0 Milliamperes	-125	---	---	-40	Volts
Triode Amplification Factor $\S\S$	---	---	---	4.0	


MINIMUM RECOMMENDED GRID DRIVE

Peak Positive Pulse Plate Voltage	5000	6000	Volts
Peak Negative Grid-Number 1 Voltage for E _{g2} = 150 Volts	-190	-210	Volts
Peak Negative Grid-Number 1 Voltage for E _{g2} = 200 Volts	-210	-235	Volts


NOTES

- * Heater voltage for a bogey tube at $I_f = 0.6$ amperes.
- # The equipment designer should design the equipment so that heater current is centered at the specified bogey value, with heater supply variations restricted to maintain heater current within the specified tolerance.
- § The time required for the voltage across the heater to reach 80 percent of the bogey value after applying 4 times the bogey heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the bogey heater voltage divided by the bogey heater current.
- ¶ Without external shield.
- # For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.
- Δ In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.
- ♠ The circuit design has to be such that negative control grid currents up to 5 microamperes do not have any detrimental effect upon tube adjustment or circuit performance. Care should be taken so that the limiting values for plate dissipation, screen dissipation and cathode current are not exceeded with 5 microamperes grid current.
- ** Measured with an infrared thermometer, Ircon Model 700 BC or equivalent, at an ambient temperature of 40° C.
- ## Values measured by a method involving a recurrent waveform such that the plate and screen dissipations will be kept within ratings in order to prevent damage to the tube.
- §§ Triode connection (screen tied to plate) with $E_b = E_{c2} = 175$ volts, and $E_{c1} = -21$ volts.


AVERAGE PLATE CHARACTERISTICS

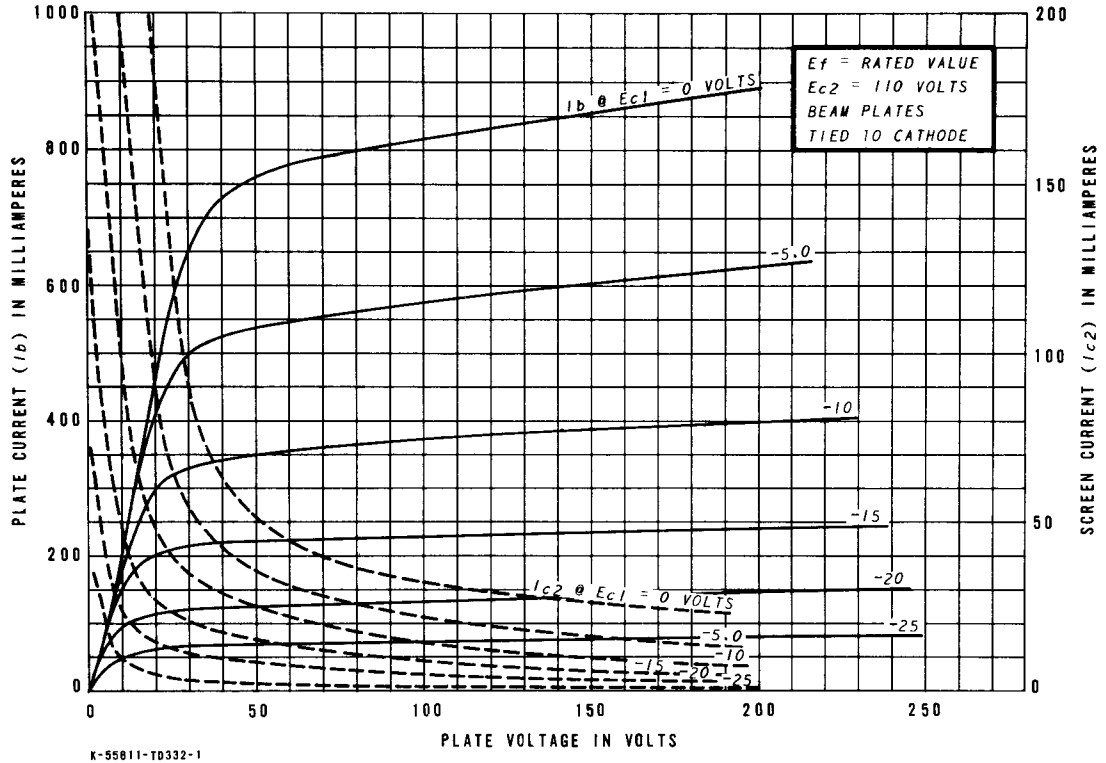

AVERAGE PLATE CHARACTERISTICS

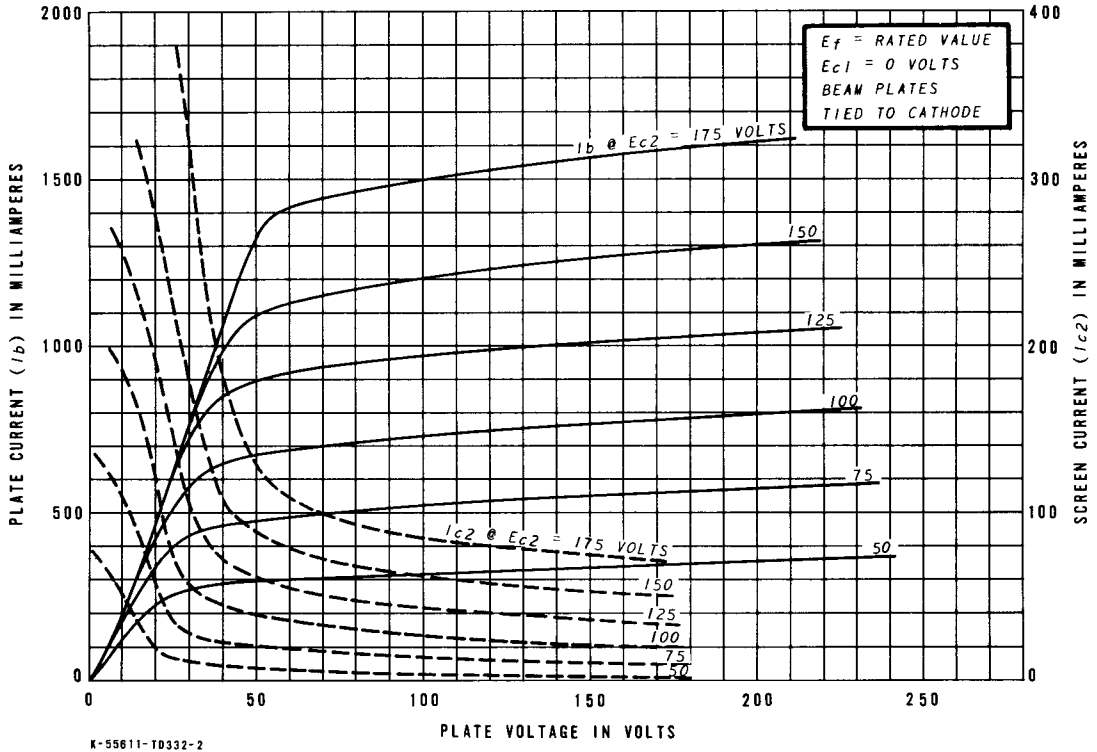


AVERAGE TRANSFER CHARACTERISTICS

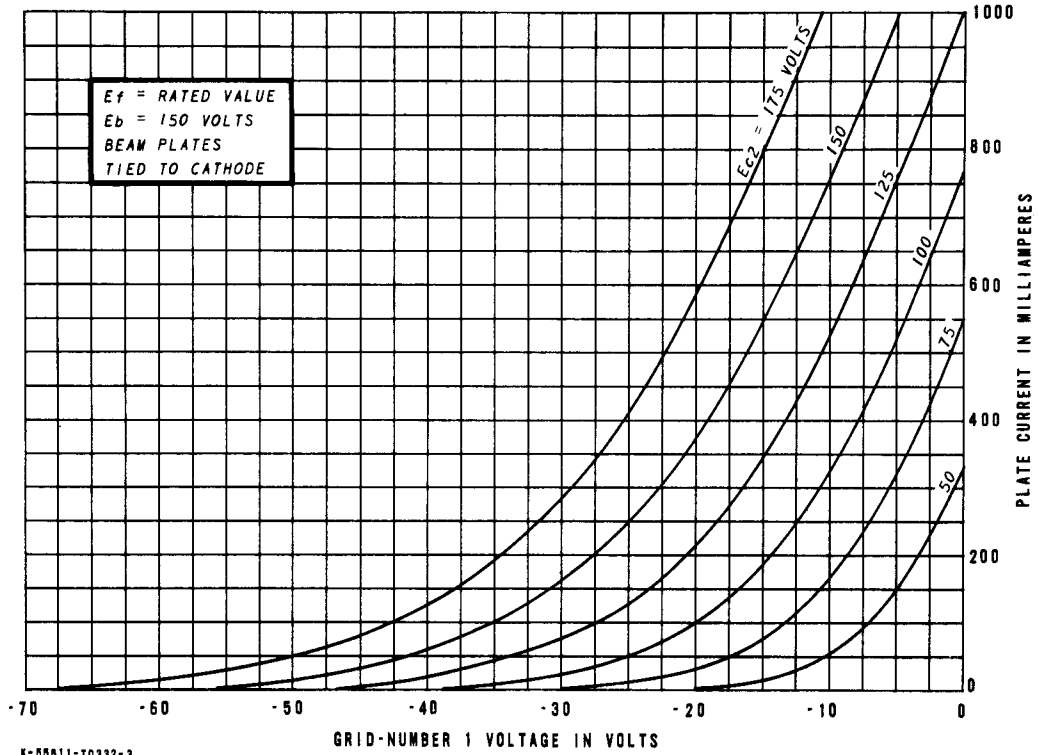


K-55811-T0332-3

AVERAGE TRANSFER CHARACTERISTICS

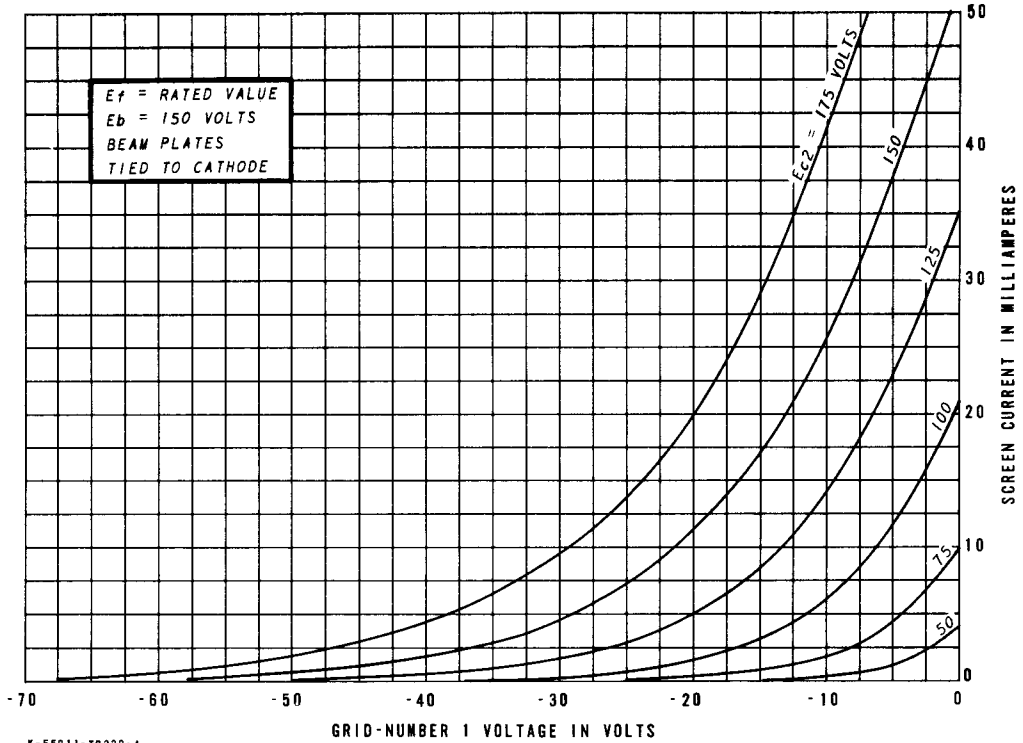

K-55811-T0332-4

RECOMMENDED MINIMUM PEAK NEGATIVE
GRID VOLTAGE vs PEAK POSITIVE PULSE
PLATE VOLTAGE

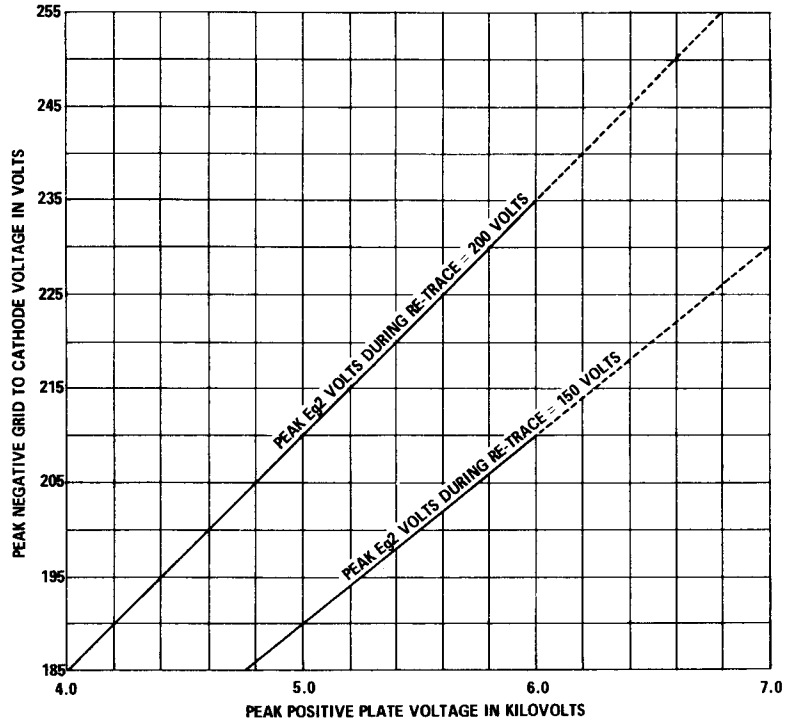

TUBE DEPARTMENT



Owensboro, Kentucky 42301