



| DIMENSIONS: | |
|-------------|------------------------|
| A | 2.500" ±0.063 |
| B | 3.080" ±0.125 |
| C | 3.080" ±0.063 |
| D | 2.000" ±0.063 |
| E | 2.063" ±0.063 |
| G | 0.203" x 0.375" ±0.015 |

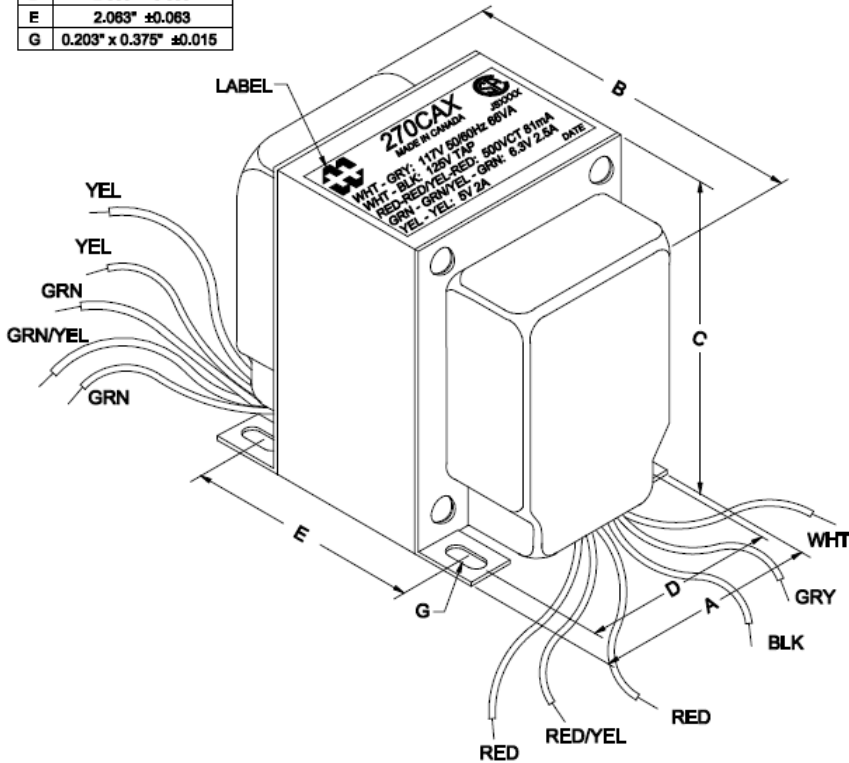

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

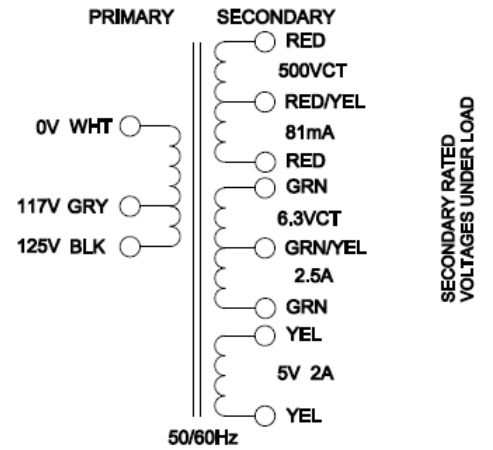

| ELECTRICAL DATA: | | |
|------------------|---------------------------------|---------------------|
| TESTS | CONDITIONS | ACCEPTANCE CRITERIA |
| Iex | @ 125V, 60Hz, WHT - BLK | 170.4mA Max. |
| Sec. N.L.V | @ 125V, 60Hz, WHT - BLK | |
| | RED - RED = | 545.2V ±2% |
| | RED - RED/YEL = RED/YEL - RED = | 272.6V ±2% |
| | YEL - YEL = | 5.585V ±2% |
| | GRN - GRN/YEL = GRN/YEL - GRN = | 3.457V ±2% |
| | GRN - GRN = | 6.915V ±2% |
| DCR | @ 20°C, WHT - BLK = | 5.715 Ω ±20% |
| | @ 20°C, RED - RED = | 232.3 Ω ±20% |
| | @ 20°C, YEL - YEL = | 0.082 Ω ±20% |
| | @ 20°C, GRN - GRN = | 0.088 Ω ±20% |
| HIPOT | PRIMARY - SECONDARY | 2000V, 60Hz, 1 SEC |