



DIMENSIONS:	
A	3.750" ±0.063
B	4.438" ±0.125
C	4.500" ±0.063
D	2.060" ±0.063
E	3.000" ±0.063
F	3.750" ±0.063

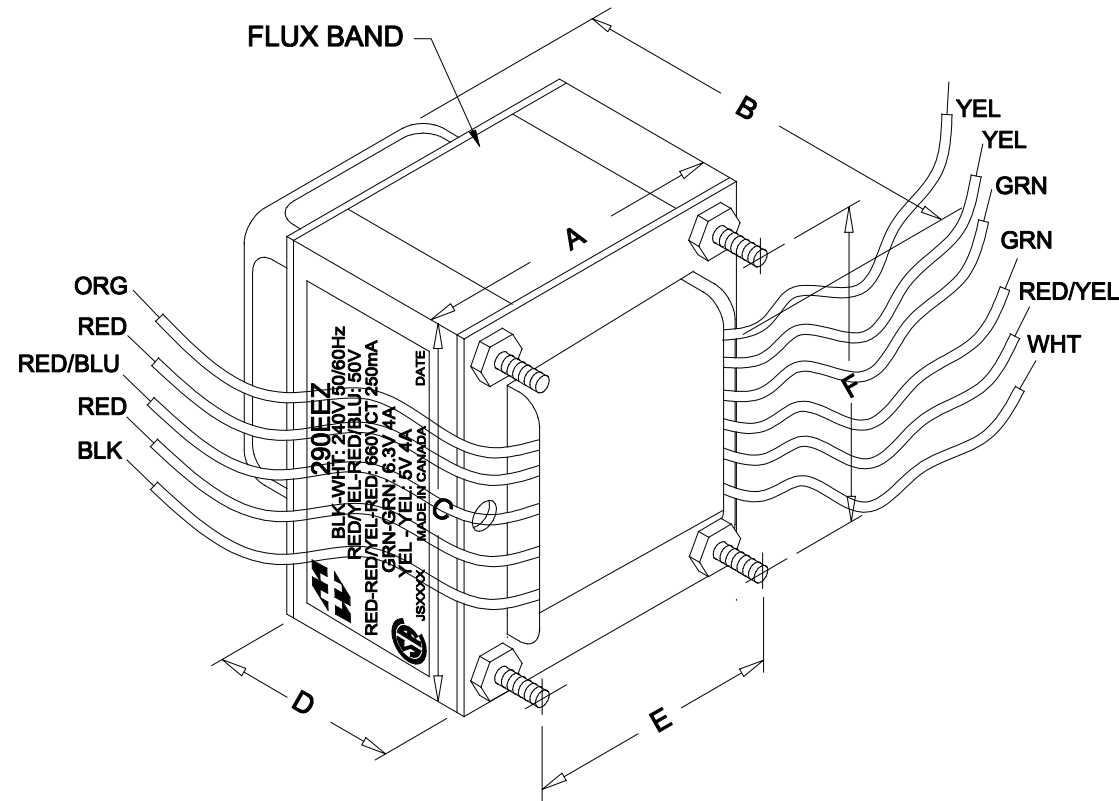

NOTE: ALL LEADS 9" OUT MIN., STRIPPED .5"

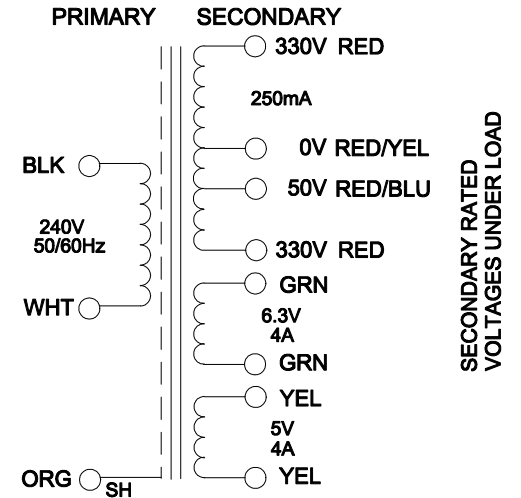

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 240V, 60Hz, BLK - WHT	127.2mA	Max.
Sec. N.L.V	@ 240V, 60Hz, BLK - WHT		
	RED - RED/YEL = RED/YEL - RED =	342.9V	±2%
	RED/YEL - RED/BLU =	51.96V	±2%
	RED - RED =	685.7V	±2%
	GRN - GRN =	6.429V	±2%
	YEL - YEL =	5.357V	±2%
DCR	@ 20°C, BLK - WHT =	4.038 Ω	±20%
	@ 20°C, RED - RED/YEL =	26.66 Ω	±20%
	@ 20°C, RED/YEL - RED =	28.17 Ω	±20%
	@ 20°C, RED/YEL - RED/BLU =	4.155 Ω	±20%
	@ 20°C, GRN - GRN =	0.027 Ω	±20%
	@ 20°C, YEL - YEL =	0.024 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED.	C.I. 09/25/17

HAMMOND
MANUFACTURING™

ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5

PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE
DATE: 09/25/17

CHK'D BY:
APP'D. BY:
DIMENSIONS: IN(X) MM()

TITLE: POWER
TRANSFORMER

DWG. NO.
290EEZ