


DIMENSIONS:	
A	3.750" ±0.063
B	4.935" ±0.125
C	4.560" ±0.063
D	3.000" ±0.063
E	3.813" ±0.063
G	0.203" x 0.375" ±0.015

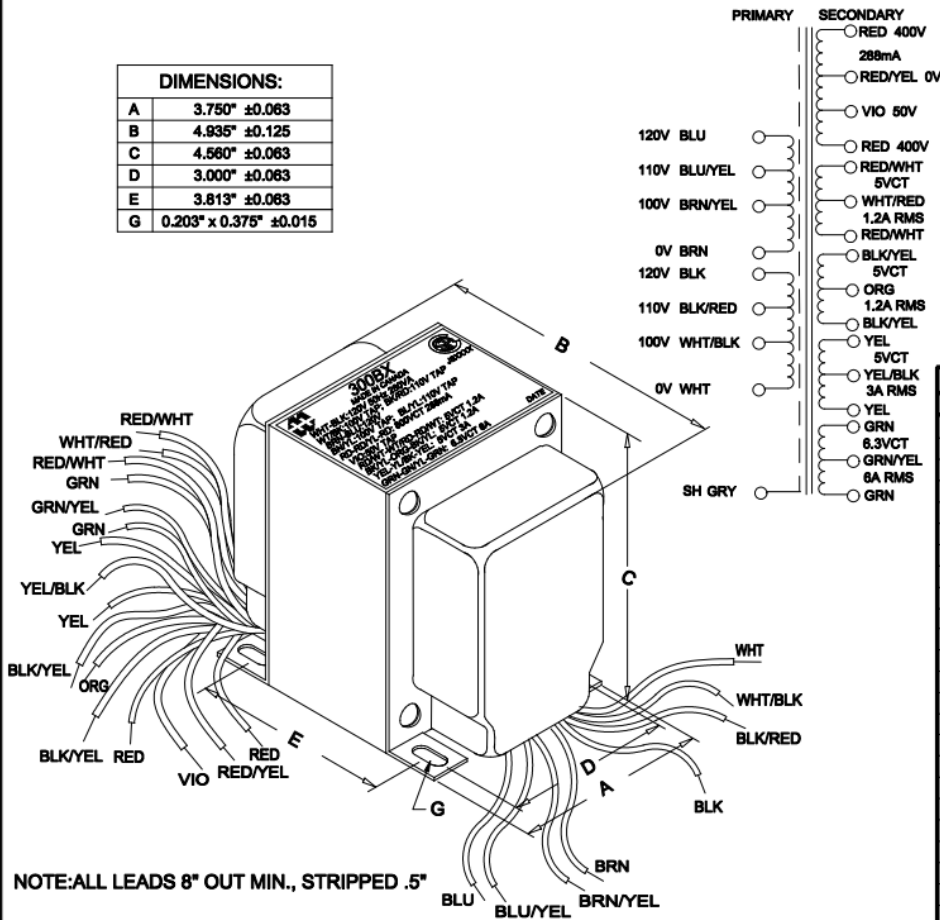

NOTE: ALL LEADS 8" OUT MIN., STRIPPED .5"

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 120V, 60Hz, WHT - BLK	50mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
		RED - RED =	865.7V ±2%
		RED - RED/YEL = RED/YEL - RED =	432.9V ±2%
		RED/YEL - VIO =	51.96V ±2%
		RD/WT - WT/RD = WT/RD - RD/WT =	2.679V ±2%
		RED/WHT - RED/WHT =	5.357V ±2%
		BLK/YEL - ORG = ORG - BLK/YEL =	2.679V ±2%
		BLK/YEL - BLK/YEL =	5.357V ±2%
		YEL - YEL/BLK = YEL/BLK - YEL =	2.679V ±2%
		YEL - YEL =	5.357V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.482V ±2%	
	GRN - GRN =	6.964V ±2%	
DCR	@ 20°C, WHT - BLK =	2.145 Ω	±20%
	@ 20°C, BRN - BLU =	2.324 Ω	±20%
	@ 20°C, RED - RED =	93.41 Ω	±20%
	@ 20°C, RED/WHT - RED/WHT =	0.120 Ω	±20%
	@ 20°C, BLK/YEL - BLK/YEL =	0.123 Ω	±20%
	@ 20°C, YEL - YEL =	0.050 Ω	±20%
	@ 20°C, GRN - GRN =	0.053 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	