


DIMENSIONS:	
A	3.750" ±0.063
B	4.063" ±0.125
C	4.500" ±0.063
D	1.810" ±0.063
E	3.000" ±0.063
F	3.750" ±0.063
G	0.750" ±0.125
H	3.375" ±0.063
J	2.593" ±0.063

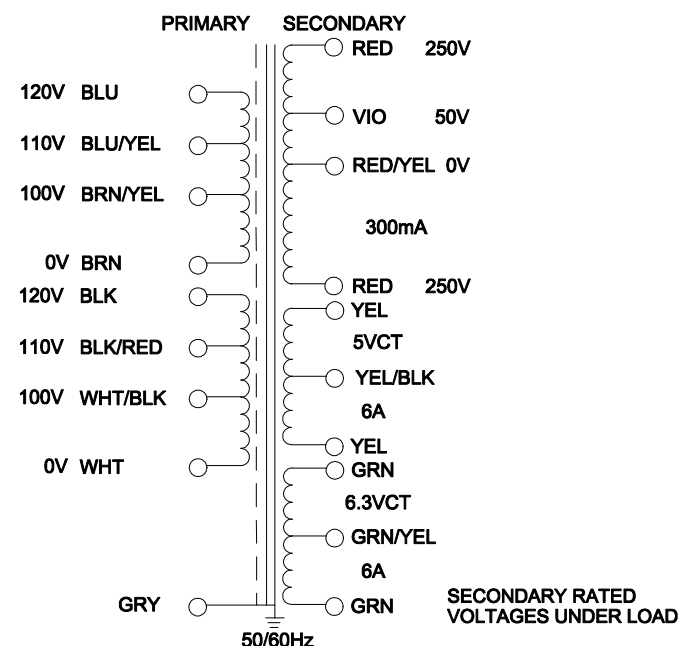

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 120V, 60Hz, WHT - BLK	232mA Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK	
	RED - RED =	528.0V ±2%
	RED - RED/YEL = RED/YEL - RED =	264.0V ±2%
	RED/YEL - VIO =	52.80V ±2%
	YEL - YEL =	5.280V ±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.640V ±2%
	GRN - GRN =	6.720V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.360V ±2%
DCR	@ 20°C, WHT - BLK =	2.501 Ω ±20%
	@ 20°C, BRN - BLU =	2.726 Ω ±20%
	@ 20°C, RED - RED =	42.43 Ω ±20%
	@ 20°C, YEL - YEL =	0.022 Ω ±20%
	@ 20°C, GRN - GRN =	0.030 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

NOTE: ALL LEADS 8" OUT MIN.

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	C.I. 06/19/19	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			DWG. BY: C. ILIE	CHK'D BY:	DWG. NO. 370KZ
			DATE: 06/19/19	APP'D. BY: DIMENSIONS: IN(X) MM()	
				TITLE: POWER TRANSFORMER	