



DIMENSIONS:	
A	3.750" ±0.063
B	5.000" ±0.125
C	4.560" ±0.063
D	3.000" ±0.063
E	3.813" ±0.063
G	0.203" x 0.375" ±0.015

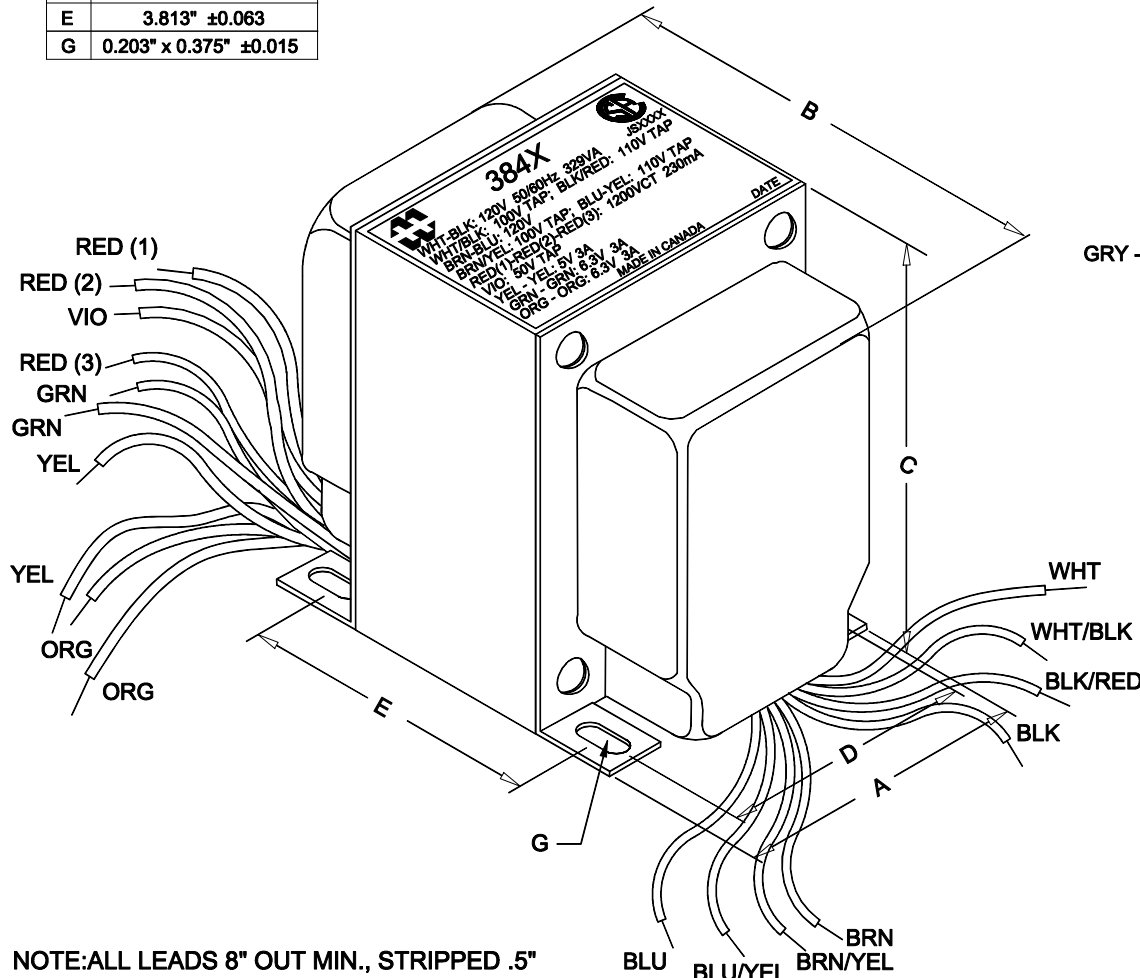

NOTE: ALL LEADS 8" OUT MIN., STRIPPED .5"

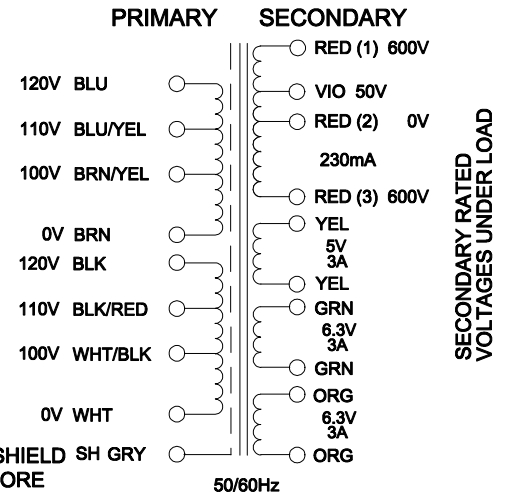

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 120V, 60Hz, WHT - BLK	300mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	WHT - WHT/BLK = BRN - BRN/YEL =	100.2V	±2%
	WHT - BLK/RED = BRN - BLU/YEL =	110.1V	±2%
	BRN - BLU =	120.0V	±2%
	RED (1) - RED (3) =	1252.7V	±2%
	RED (1) - RED (2) = RED (2) - RED (3) =	626.4V	±2%
	RED (2) - VIO =	52.75V	±2%
	YEL - YEL =	5.275V	±2%
	GRN - GRN =	6.593V	±2%
	ORG - ORG =	6.593V	±2%
DCR	@ 20°C, WHT - BLK =	1.389 Ω	±20%
	@ 20°C, BRN - BLU =	1.518 Ω	±20%
	@ 20°C, RED (1) - RED (3) =	112.6 Ω	±20%
	@ 20°C, RED (2) - VIO =	4.767 Ω	±20%
	@ 20°C, YEL - YEL =	0.040 Ω	±20%
	@ 20°C, GRN - GRN =	0.052 Ω	±20%
	@ 20°C, ORG - ORG =	0.053 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4250V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED.	C.I. 09/27/16

HAMMOND ELECTRONIC DIVISION
MANUFACTURING™
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181
 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 384X
DATE: 09/27/16	APP'D. BY:		
	DIMENSIONS: IN(X) MM()		